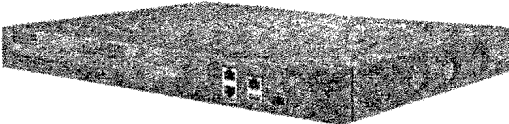
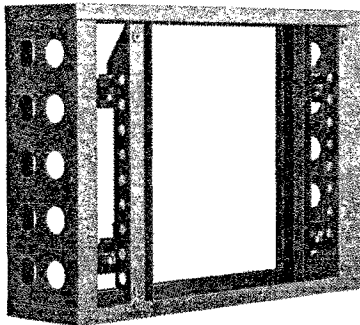



(Data Science and Computer Vision Lab Equipment Price List)

S. No	Component	Specifications	Quantity
1	HIKVISION DS-6904UDI(B) 4K Decoder	 Specs and Features: • Provides HDMI (adaptable to DVI-D) and BNC output interfaces. • Up to 4K (3840 × 2160@30Hz) via HDMI output interfaces (only for odd interface). • H.265+/H.265, H.264+/H.264, Hik264, MPEG4 and MJPEG video compression. • PS, RTP, TS, ES, HIK encapsulation formats. • Three encoding levels: baseline, main, and high-profile. • G.722, G711A, G726, G711U, MPEG2-L2, and AAC audio compression. • Two decoding modes: active decoding and passive decoding. • Remote video files' decoding output. • Provides DVI input interface. • Supports window opening, window roaming and window split. • Supports multi-screen control with PC installed with RSC server. • Gets stream and decodes via URL and RTSP from encoding devices. • Displays the decoded video stream on the video wall by directly linking cameras or by stream media forwarding. • You can configure what the video wall shows when decoding ends and streaming fails via the Web browser and client software. • Configurable LED width and height parameters when the LED is connected. • Regular and irregular virtual screen configurable to display multiple signal sources and get rid of the restriction of physical screen. • Accessible by 2.4 MP DeepinView camera. • Accessible by thermal network camera and you can view the temperature measurement, dynamic fire source detection, ship detection and VCA information in live view and playback. • You can enable or disable the smart information for the thermal network camera.	2

		Port aggregation technology (Ethernet Channel). With nut bolts and screws Warranty: OEM Or Equivalent to Above Specs	
2	Hikvision Modular Bracket(Frame) DS-DN55B3M/F	 Specs and Features: - Solid steel structure, preventing screen bending or twisting - Cold-rolled steel plate (SPCC) - Simple and elegant in design - VESA 600 (H) mm × 400 (V) mm - Dimension (W × H × D) 848 mm × 682.5 mm × 200mm (33.39" × 26.87" × 7.87") - Gross Weight 23.8 ± 0.5 Kg (52.47 ± 1.1 lb) - With nut bolts and screws - Net Weight 20.8 ± 0.5 Kg (45.86 ± 1.1 lb) Warranty: OEM Or Equivalent to Above Specs	8
3	Hikvision Modular Bracket(Base) DS-DN55B3M/B	 Specs and Features: - Solid steel structure, preventing screen bending or twisting - Cold-rolled steel plate (SPCC) - Simple and elegant in design - Dimension (W × H × D) 1213.5 mm × 800 mm × 334 mm (47.78" × 31.5" × 13.15") - Gross Weight 69.83 ± 0.5 Kg (153.95 ± 1.1 lb) - Net Weight 62.3 ± 0.5 Kg (137.35 ± 1.1 lb) - With nut bolts and screws Warranty: OEM Or Equivalent to Above Specs	4

4	55-inch 3.5mm LCD Display Unit DS-D2055LU-Y	 Specs and Features: • 4K signal input, auto loop up to 30 screens with HDMI interfaces • Switching between three picture modes: Monitoring, Meeting, and Movie • Factory calibration for color and brightness uniformity • Direct-lit LED backlight with uniform brightness and no boundary shadows • 1920 × 1080 resolution, 178° viewing angle • Ultra-narrow 3.5 mm bezel design • Anti-glare, high definition, high brightness, high color gamut, and vivid images with rich colors • Stable and 24-hour continuous working • Metal casing for preventing from radiation and magnetic & electric field interference • Wall-mount and modular brackets available to meet various installation requirements • With all accessories Warranty: 3 years Or Equivalent to Above Specs	8
---	--	--	---

- a) Required brands (where applicable, minimum 3 x brands).
- b) Specify if installation, testing, commissioning and training is required for machinery/equipment.
- c) Warranty requirement (where applicable).